




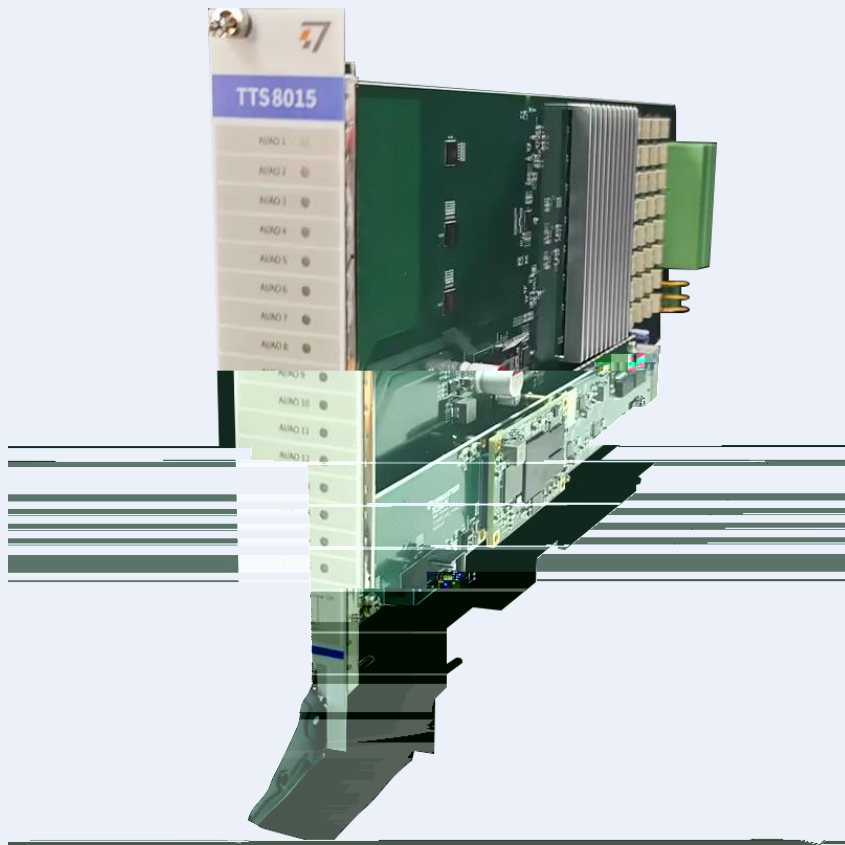

AI/AO * 16		
TTS8015	0V ~ 40V	0V ~
60V		

1288 9
4849 14-17

“ ”

@ 2024-2026 02

-
- PLC/DCS/ECU
- SCADA/DAS
-
- BMS/VCU
-

- EtherCAT
-
-



1

.....	2
.....	3
.....	3

TTS8015	TTS	16
	0 V ~ 60 V 16	0V ~ 40V
-	/ /	EtherCAT
	XML	/

1.1.



	100BASE EtherCAT
	1000BASE-T(X) Ethernet
	60-Pin
AI/AO	AI/AO * 16
	F_COM/F_GND/F_BAT
EtherCAT	100BASE-TX
	DC 24 V
	2.9 W
	380.6 * 35.56 * 172.85 mm
	10% ~ 90%




	0 ~ 40 V
	0 ~ 60 V






mm

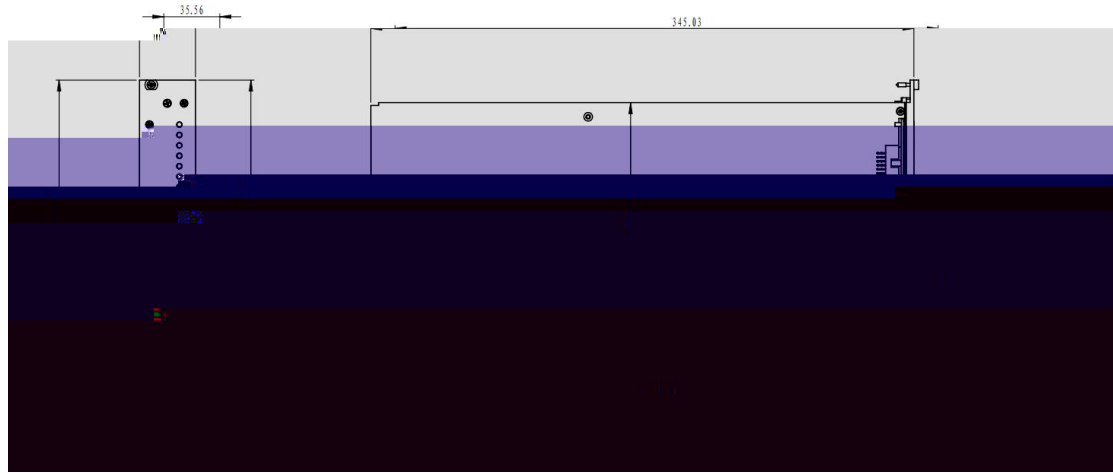

1-1

1.3.

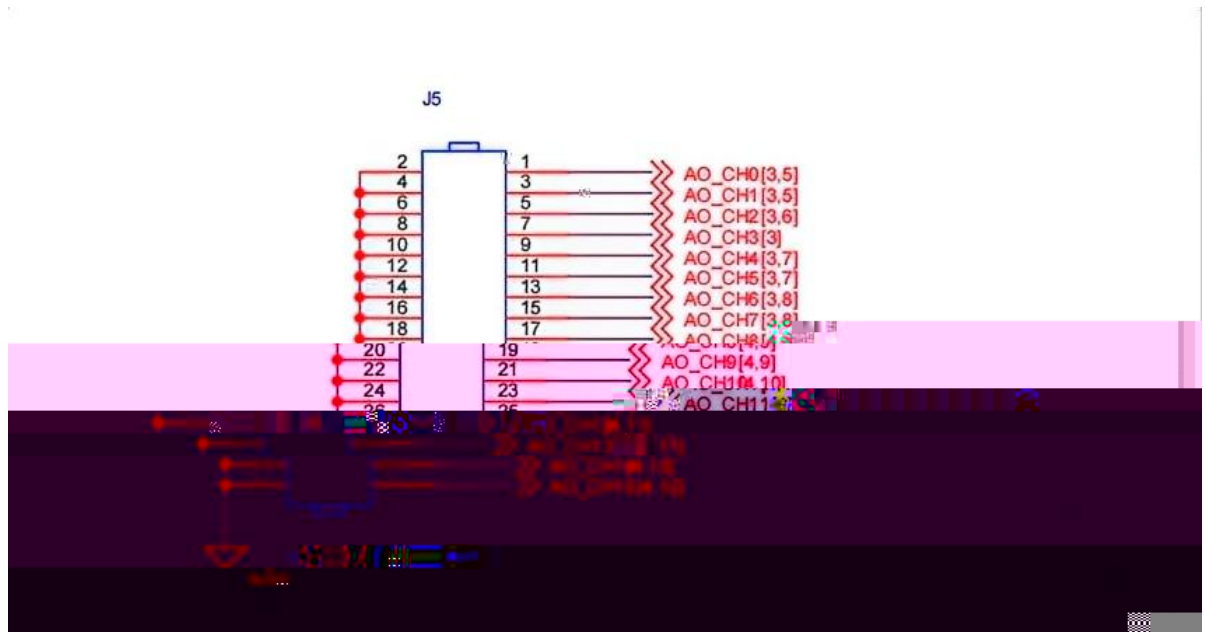

1-2

TOSUN




TTS8015

6 1




		60-Pin -24 ~ ± 3V DC	
		-40 ~ +80	
		10% ~ 90%	





V

--	--	--	--



TOSUN