



TTS8016	AI/AO * 16 -12 V ~ 12 V

1288 9
4849 14-17

@ 2026-2027

-
- PLC/DCS/ECU
- SCADA/DAS
-
- BMS/VCU
-


- EtherCAT
-
-



- 2
 -3
 -3
 - 1.5
 - 1.1. 5
 - 1.2. 6
 - 1.3. 7
 - 1.4. LED8
 - 1.5. 9
 - 1.6. 9
 - 1.7. 10
 - 2.11
 - 2.1.11
 - 2.2.11
 - 3. 12

TTS8016	TTS	16
	-12 V ~ 12 V	- /
/	EtherCAT	

1.1.




100BASE EtherCAT
1000BASE-T(X) Ethernet
60-Pin

DI/DO






mm

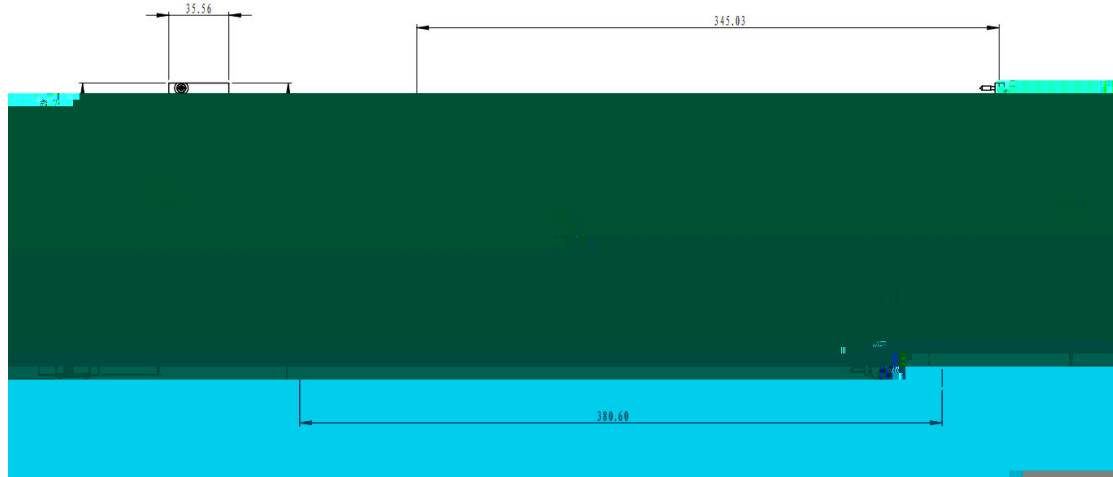

1-1

1.3.

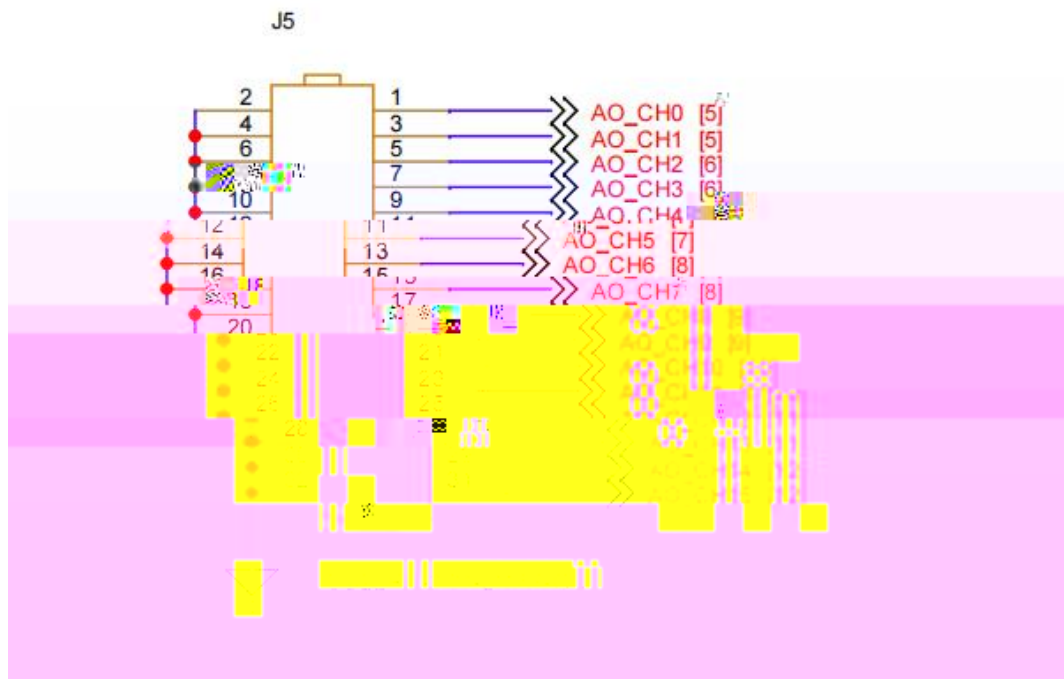

1-2

TOSUN




1.7.

TTS8016	1		
3-Pin	1		
16-Pin	2		



		60-Pin -24 ~ 3V DC	
		-40 ~ +80	
		10% ~ 90%	



--	--	--	--



TOSUN